

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

LOW VOLTAGE REFERENCE

A precision band-gap voltage reference designed for critical instrumentation and D/A converter applications. This unit is designed to work with Motorola MC1508 and MC3510 D/A converters, and MC14433 A/D systems. Low temperature drift is a prime design consideration.

- Output Voltage: $2.5 \text{ V} \pm 25 \text{ mV}$
- Input Voltage Range: 4.5 V to 40 V
- Quiescent Current: 1.2 mA Typ
- Output Current: 10 mA
- Temperature Coefficient: $10 \text{ ppm}/^\circ\text{C Typ}$
- Guaranteed Temperature Drift Specification
- Equivalent to AD580
- Standard 8-Pin DIP, and 8-Pin SOIC Package

Typical Applications

- Voltage Reference for 8–12 Bit D/A Converters
- Low T_C Zener Replacement
- High Stability Current Reference
- Voltmeter System Reference


MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Rating	Symbol	Value	Unit
Input Voltage	V_I	40	V
Storage Temperature	T_{stg}	-65 to 150	$^\circ\text{C}$
Junction Temperature	T_J	+175	$^\circ\text{C}$
Operating Ambient Temperature Range	T_A	-55 to +125	$^\circ\text{C}$
MC1503		0 to +70	$^\circ\text{C}$
MC1403,A			

MC1403,A MC1503


PRECISION LOW VOLTAGE REFERENCE

LASER TRIMMED INTEGRATED CIRCUIT



U SUFFIX
CERAMIC PACKAGE
CASE 693


D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO-8)



ORDERING INFORMATION

Device	Temperature Range	Package
MC1503U	-55 to +125 $^\circ\text{C}$	Ceramic DIP
MC1403D		SO-8
MC1403U	0 to +70 $^\circ\text{C}$	Ceramic DIP
MC1403AU		Ceramic DIP
MC1403BD		SO-8

FIGURE 1 – A REFERENCE FOR MOTOROLA MONOLITHIC D/A CONVERTERS

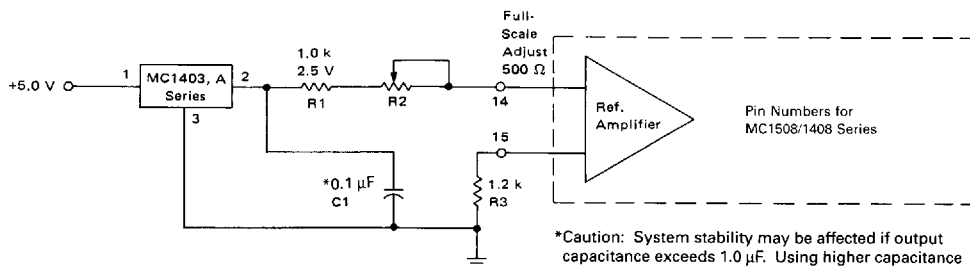

PROVIDING THE REFERENCE CURRENT FOR MOTOROLA MONOLITHIC D/A CONVERTERS

The MC1403/1503 makes an ideal reference for the Motorola monolithic D/A converters. The MC1408/1508 converter requires a stable current reference of nominally 2.0 mA . This can be easily obtained from the MC1403/1503 with the addition of a series resistor, R_1 . A variable resistor, R_2 , is recommended to provide means for full-scale adjust on the D/A converter.

*Caution: System stability may be affected if output capacitance exceeds $1.0 \mu\text{F}$. Using higher capacitance values is not recommended and should be carefully considered.

The resistor R_3 improves temperature performance by matching the impedance on both inputs of the D/A reference amplifier. The capacitor decouples any noise present on the reference line. It is essential if the D/A converter is located any appreciable distance from the reference.

A single MC1403/1503 reference can provide the required current input for up to five of the monolithic D/A converters.

MC1403,A, MC1503

ELECTRICAL CHARACTERISTICS ($V_{in} = 15\text{ V}$, $T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage ($I_O = 0 \text{ mA}$)	V_{OUT}	2.475	2.5	2.525	V
Temperature Coefficient of Output Voltage MC1503 MC1403* MC1403A	$\Delta V_O / \Delta T$	— — —	— 10 10	55 40 25	ppm/°C
Output Voltage Change (over specified temperature range) MC1503 -55°C to +125°C MC1403* 0°C to +70°C MC1403A 0°C to +70°C	ΔV_O	— — —	— — —	25 7.0 4.4	mV
Line Regulation ($I_O = 0 \text{ mA}$) (15 V $\leq V_I \leq 40 \text{ V}$) (4.5 V $\leq V_I \leq 15 \text{ V}$)	Reg _{line}	— —	1.2 0.6	4.5 3.0	mV
Load Regulation (0 mA $< I_O < 10 \text{ mA}$)	Reg _{load}	—	—	10	mV
Quiescent Current ($I_O = 0 \text{ mA}$)	I_Q	—	1.2	1.5	mA

*This test is not applicable to the MC1403D surface mount device.

FIGURE 2 – MC1403/1503 SCHEMATIC

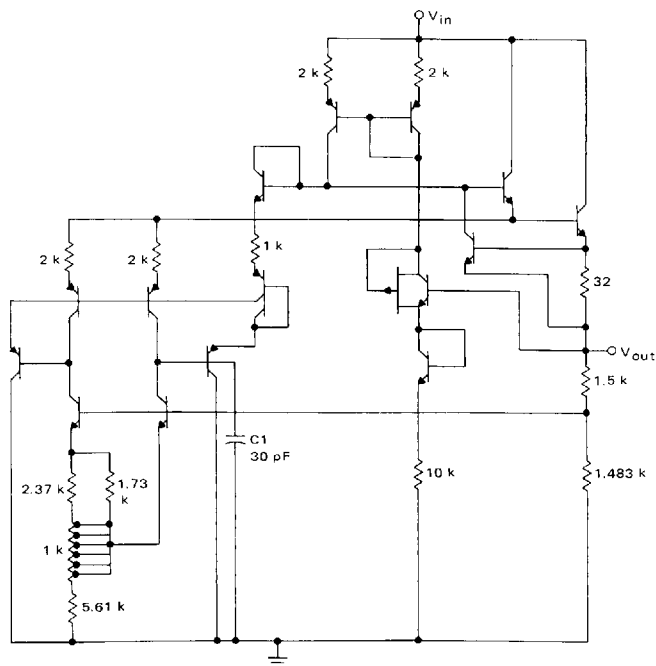
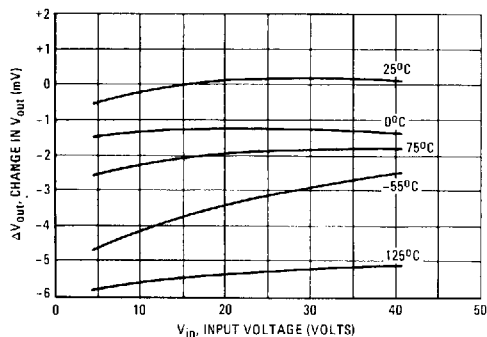
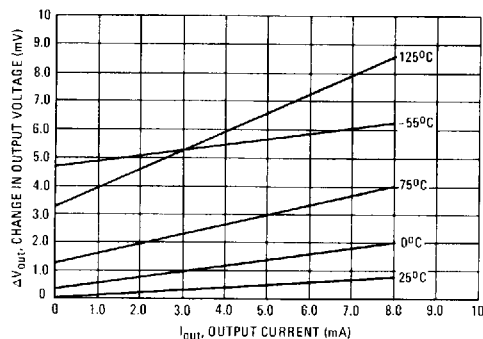
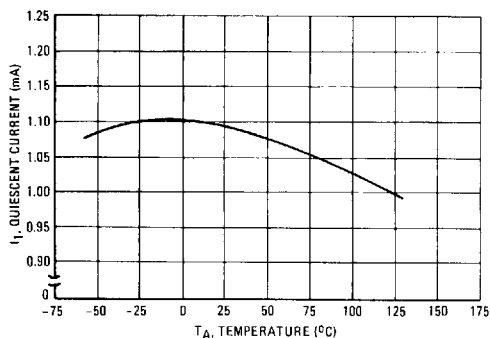
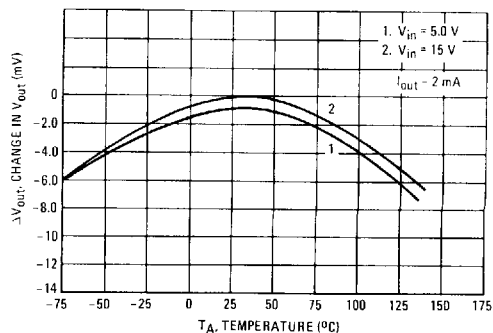
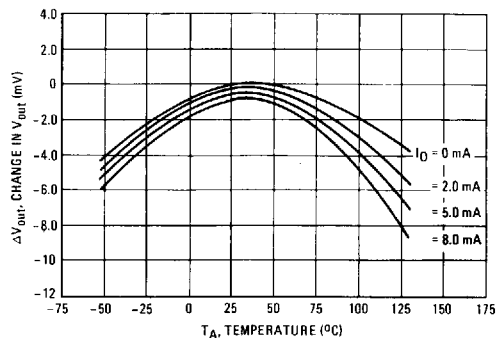


FIGURE 3 – TYPICAL CHANGE IN V_{out} versus V_{in}
 (NORMALIZED TO $V_{in} = 15\text{ V}$ @ $T_C = 25^\circ\text{C}$)

FIGURE 4 – CHANGE IN OUTPUT VOLTAGE
 versus LOAD CURRENT
 (NORMALIZED TO V_{out} @ $V_{in} = 15\text{ V}$, $I_{out} = 0\text{ mA}$)

FIGURE 5 – QUIESCENT CURRENT versus TEMPERATURE
 ($V_{in} = 15\text{ V}$, $I_{out} = 0\text{ mA}$)

FIGURE 6 – CHANGE IN V_{out} versus TEMPERATURE
 (NORMALIZED TO V_{out} @ $V_{in} = 15\text{ V}$)

FIGURE 7 – CHANGE IN V_{out} versus TEMPERATURE
 (NORMALIZED TO $T_A = I_0$, $V_{in} = 15\text{ V}$, $I_{out} = 0\text{ mA}$)


MC1403,A, MC1503

3-1/2-DIGIT VOLTMETER — COMMON ANODE
DISPLAYS, FLASHING OVERRANGE

An example of a 3-1/2-digit voltmeter using the MC14433 is shown in the circuit diagram of Figure 8. The reference voltage for the system uses an MC1403 2.5 V reference IC. The full scale potentiometer can calibrate for a full scale of 199.9 mV or 1.999 V. When switching from 2 V to 200 mV operation, R_1 is also changed, as shown on the diagram.

When using R_C equal to 300 k Ω , the clock frequency for the system is about 66 kHz. The resulting conversion time is approximately 250 ms.

When the input is overrange, the display flashes on and off. The flashing rate is one-half the conversion rate.

This is done by dividing the EOC pulse rate by 2 with 1/2 MC14013B flip-flop and blanking the display using the blanking input of the MC14543B.

The display uses an LED display with common anode digit lines driven with an MC14543B decoder and an MC1413 LED driver. The MC1413 contains 7 Darlington transistor drivers and resistors to drive the segments of the display. The digit drive is provided by four MPS-A12 Darlington transistors operating in an emitter-follower configuration. The MC14543B, MC14013B and LED displays are referenced to V_{EE} via pin 13 of the MC14433. This places the full power supply voltage across the display. The current for the display may be adjusted by the value of the segment resistors shown as 150 ohms in Figure 8.

FIGURE 8 — 3-1/2-DIGIT VOLTMETER

